

RECEIVED

FEB 13 2023

AIR QUALITY DIVISION

**AIR EMISSION TEST REPORT
FOR THE
VERIFICATION OF AIR POLLUTANT EMISSIONS
FROM
LANDFILL GAS FIRED ENGINE – GENERATOR SETS**

**Prepared for:
North American Natural Resources, Inc.
SBL-LLC Facility
SRN N5432**

**ICT Project No.: 2200201
January 30, 2023**



Report Certification

**AIR EMISSION TEST REPORT
FOR THE
VERIFICATION OF AIR POLLUTANT EMISSIONS
FROM
LANDFILL GAS FIRED ENGINE – GENERATOR SETS**

**NANR SBL-LLC Facility
Buchanan, Michigan**

The material and data in this document were prepared under the supervision and direction of the undersigned.

Impact Compliance & Testing, Inc.



Clay Gaffey
Project Manager

Table of Contents

1.0 INTRODUCTION.....	1
2.0 SUMMARY OF TEST RESULTS AND OPERATING CONDITIONS	3
2.1 Purpose and Objective of the Tests.....	3
2.2 Operating Conditions During the Compliance Tests	3
2.3 Summary of Air Pollutant Sampling Results	3
3.0 SOURCE AND SAMPLING LOCATION DESCRIPTION.....	5
3.1 General Process Description	5
3.2 Rated Capacities and Air Emission Controls	5
3.3 Sampling Locations	5
4.0 SAMPLING AND ANALYTICAL PROCEDURES.....	6
4.1 Summary of Sampling Methods.....	6
4.2 Exhaust Gas Velocity Determination (USEPA Method 2)	7
4.3 Exhaust Gas Molecular Weight Determination (USEPA Methods 3A).....	7
4.4 Exhaust Gas Moisture Content (USEPA Method 4).....	7
4.5 NO _x and CO Concentration Measurements (USEPA Methods 7E and 10)	8
4.6 NMHC Concentration Measurements (USEPA Methods 25A and ALT-096).....	8
5.0 QA/QC ACTIVITIES.....	9
5.1 Flow Measurement Equipment.....	9
5.2 NO _x Converter Efficiency Test	9
5.3 Gas Divider Certification (USEPA Method 205).....	9
5.4 Instrumental Analyzer Interference Check.....	9
5.5 Instrument Calibration and System Bias Checks	10
5.6 Determination of Exhaust Gas Stratification	10
5.7 Meter Box Calibrations	10
6.0 RESULTS	12
6.1 Test Results and Allowable Emission Limits.....	12
6.2 Variations from Normal Sampling Procedures or Operating Conditions	12

List of Tables

2.1	Average operating conditions during the test periods	4
2.2	Average measured emission rates for the engine (three-test average)	4
6.1	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 1 (EUENGINE1-S2).....	13
6.2	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 2 (EUENGINE2-S2).....	14
6.3	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 3 (EUENGINE3-S2).....	15
6.4	Maximum calculated annual emissions for FGEngines-S2 based on measured hourly emission rates	16

List of Appendices

APPENDIX 1	SAMPLING DIAGRAMS
APPENDIX 2	OPERATING RECORDS
APPENDIX 3	FLOWRATE CALCULATIONS AND DATA SHEETS
APPENDIX 4	CO ₂ , O ₂ , CO, NO _x AND VOC CALCULATIONS
APPENDIX 5	INSTRUMENTAL ANALYZER RAW DATA
APPENDIX 6	QA/QC RECORDS

1.0 Introduction

Kinder Morgan (KM) operates gas-fired reciprocating internal combustion engine (RICE) and electricity generator sets at the SBC-LLC Facility in Buchanan, Berrien County, Michigan. These RICE gensets were previously operated by North American Natural Resources (NANR). The RICE are fueled by landfill gas (LFG) that is recovered from the Southeast Berrien County Landfill Authority. The recovered gas is transferred to the NANR facility where it is treated and used as fuel.

The Michigan Department of Environment, Great Lakes and Energy – Air Quality Division (EGLE-AQD) has issued to NANR a Renewable Operating Permit (MI-ROP-N5432-2022) for operation of the renewable electricity generation facility, which consists of:

- Three (3) Caterpillar (CAT®) Model No. 3520C RICE-generator sets identified as emission units EUENGINE1-S2 – EUENGINE3-S2 (Flexible Group ID: FGENGINE-S2 and FGRICENSPS-S2).
- Landfill gas treatment system identified as emission unit EUTREATMENTSYS-S2.

Air emission compliance testing was performed pursuant to MI-ROP-N5432-2022. Conditions of the ROP for FGENGINE-S2 state:

1. *Every 8760 hours of operation (as determined through the use of a non-resettable hour meter) or three years, from the most recent stack test, the permittee shall verify NO_x and CO emission rates from each engine in FGENGINE-S2, by testing at owner's expense, in accordance with Department requirements.*

Conditions of MI-ROP-N5432-2022 for FGRICENSPS-S2 state:

1. *The permittee shall conduct an initial performance test shall, except as provided in 40 CFR 60.4243(b), for each engine in FGRICENSPS-S2 within one year after startup of the engine and every 8760 hours of operation (as determined through the use of a non-resettable hour meter) or three years, whichever occurs first, to demonstrate compliance with the emission limits in 40 CFR 60.4233(e).*

The compliance testing presented in this report was performed by Impact Compliance & Testing, Inc. (ICT), a Michigan-based environmental consulting and testing company. ICT representatives Clay Gaffey and Nick Steinthal performed the field sampling and measurements December 13-14, 2022.

The engine emission performance tests consisted of triplicate, one-hour sampling periods for nitrogen oxides (NO_x), carbon monoxide (CO) and volatile organic compounds (VOC, as non-methane hydrocarbons). Exhaust gas velocity, moisture, oxygen (O₂) content, and carbon dioxide (CO₂) content were determined for each test period to calculate pollutant mass emission rates.

The exhaust gas sampling and analysis was performed using procedures specified in the Test Plan dated October 7, 2022 that was reviewed and approved by the EGLE-AQD.

Questions regarding this emission test report should be directed to:

Impact Compliance & Testing, Inc. Emission Testing Contractor	Clay Gaffey Project Manager Impact Compliance & Testing, Inc. 4180 Keller Rd., Ste. B Holt, MI 48842 Ph: (517) 481-3645 Clay.Gaffey@ImpactCandT.com
Kinder Morgan Facility Operations	Mr. Justin Boone Operations Coordinator Kinder Morgan (269) 470-2096 Justin_Boone@kindermorgan.com

RECEIVED

FEB 13 2023

AIR QUALITY DIVISION

2.0 Summary of Test Results and Operating Conditions

2.1 Purpose and Objective of the Tests

Conditions of MI-ROP-N5432-2022 and the SI-RICE NSPS require NANR to test each engine for CO, NO_x and VOC emissions.

2.2 Operating Conditions During the Compliance Tests

The testing was performed while the NANR engine/generator sets were operated at maximum operating conditions (within 10% of rated capacity). The rated capacity for the three (3) CAT® Model G3520 engine generator sets (EUENGINE1-S2 – EUENGINE3-S2) is 1,600 kW electricity output. NANR representatives provided kW output in 15-minute increments for each test period. The EUENGINE1-S2 generator kW output ranged between 1,571 and 1,598 kW, the EUENGINE2-S2 generator kW output ranged between 1,579 and 1,599 kW and EUENGINE3-S2 generator kW output ranged between 1,580 and 1,599 kW for each test period.

Fuel flowrate (scfm) and fuel methane content (%) were also recorded by NANR representatives in 15-minute increments for each test period. The EUENGINE1-S2 fuel consumption rate ranged between 590 and 603 scfm and the fuel methane content ranged between 51.0 and 51.1%. The EUENGINE2-S2 fuel consumption rate ranged between 591 and 612 scfm and fuel methane content ranged between 51.0 and 51.1%. The EUENGINE3-S2 fuel consumption rate ranged between 556 and 574 scfm and the fuel methane content ranged between 50.9 and 51.1%.

Appendix 2 provides operating records provided by NANR representatives for the test periods.

Table 2.1 presents a summary of the average engine operating conditions during the test periods.

2.3 Summary of Air Pollutant Sampling Results

The gases exhausted from the sampled LFG fueled RICE (EUENGINE1-S2 - EUENGINE3-S2) were sampled for three (3) one-hour test periods during the compliance testing performed December 13 - December 14, 2022.

Table 2.2 presents the average measured CO, NO_x and VOC emission rates for each engine (average of the three test periods).

Test results for each one-hour sampling period and comparison to the permitted emission rates are presented in Section 6.0 of this report.

Table 2.1 Average engine operating conditions during the test periods

Engine Parameter	EUENGINE1-S2 CAT® G3520	EUENGINE2-S2 CAT® G3520	EUENGINE3-S2 CAT® G3520
Generator output (kW)	1,587	1,588	1,589
Engine LFG fuel use (scfm)	596	601	565
LFG methane content (%)	51.0	51.0	51.0

Table 2.2 Average measured emission rates for each engine (three-test average)

Emission Unit	CO		NOx		VOC
	(lb/hr)	(g/bhp-hr)	(lb/hr)	(g/bhp-hr)	(g/bhp-hr)
EUENGINE1-S2	12.5	2.5	1.3	0.3	0.2
EUENGINE2-S2	12.4	2.5	1.7	0.3	0.1
EUENGINE3-S2	12.4	2.5	1.8	0.4	0.1
Permit Limit	16.3	5.0	3.0	3.0	1.0

3.0 Source and Sampling Location Description

3.1 General Process Description

NANR is permitted to operate three RICE-generator sets at its facility; three (3) CAT® Model No. G3520 RICE. The units are fired exclusively with LFG that is recovered from the Southeast Berrien County Landfill solid waste disposal facility and treated prior to use.

3.2 Rated Capacities and Air Emission Controls

The CAT® G3520 engine generator set has a rated design capacity of:

- Engine Power: 2,233 bhp
- Electricity Generation: 1,600 kW

Each engine is equipped with an electronic air-to-fuel ratio (AFR) controller that blends the appropriate ratio of combustion air and treated LFG fuel.

The RICE are not equipped with add-on emission control devices. The AFR controller maintains efficient fuel combustion, which minimizes air pollutant emissions. Exhaust gas is exhausted directly to atmosphere through a noise muffler and vertical exhaust stack.

3.3 Sampling Locations

The RICE exhaust gas is directed through a muffler and is released to the atmosphere through a dedicated vertical exhaust stack with a vertical release point.

The exhaust stacks for the CAT® Model G3520 RICE are identical. The exhaust stack sampling ports are located before the muffler in the horizontal exhaust duct with an inner diameter of 13.0 inches. The stack is equipped with two (2) sample ports, opposed 90°, that provide a sampling location 28.0 inches (2.15 duct diameters) upstream and >140.0 inches (>10.7 duct diameters) downstream from any flow disturbance.

All sample port locations satisfy the USEPA Method 1 criteria for a representative sample location. Individual traverse points were determined in accordance with USEPA Method 1.

Appendix 1 provides diagrams of the emission test sampling locations.

4.0 Sampling and Analytical Procedures

A test protocol for the air emission testing was reviewed and approved by the EGLE-AQD. This section provides a summary of the sampling and analytical procedures that were used during the testing periods.

4.1 Summary of Sampling Methods

USEPA Method 1	Exhaust gas velocity measurement locations were determined based on the physical stack arrangement and requirements in USEPA Method 1
USEPA Method 2	Exhaust gas velocity pressure was determined using a Type-S Pitot tube connected to a red oil incline manometer; temperature was measured using a K-type thermocouple connected to the Pitot tube.
USEPA Method 3A	Exhaust gas O ₂ and CO ₂ content was determined using paramagnetic and infrared instrumental analyzers, respectively.
USEPA Method 4	Exhaust gas moisture content was determined by gravimetric analysis of moisture gain in chilled impingers
USEPA Method 7E	Exhaust gas NO _x concentration was determined using chemiluminescence instrumental analyzers.
USEPA Method 10	Exhaust gas CO concentration was measured using an infrared instrumental analyzer
USEPA Method 25A / ALT-096	Exhaust gas VOC (as NMHC) concentration was determined using a flame ionization analyzer equipped with methane separation column

4.2 Exhaust Gas Velocity Determination (USEPA Method 2)

The RICE exhaust stack gas velocities and volumetric flow rates were determined using USEPA Method 2 prior to and after each test period. An S-type Pitot tube connected to a red-oil manometer was used to determine velocity pressure at each traverse point across the stack cross section. Gas temperature was measured using a K-type thermocouple mounted to the Pitot tube. The Pitot tube and connective tubing were leak-checked periodically throughout the test periods to verify the integrity of the measurement system.

The absence of significant cyclonic flow at the sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each velocity traverse point with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

Appendix 3 provides exhaust gas flowrate calculations and field data sheets.

4.3 Exhaust Gas Molecular Weight Determination (USEPA Method 3A)

CO₂ and O₂ content in the RICE exhaust gas stream was measured continuously throughout each test period in accordance with USEPA Method 3A. The CO₂ content of the exhaust was monitored using a Servomex infrared gas analyzer. The O₂ content of the exhaust was monitored using a Servomex gas analyzer that uses a paramagnetic sensor.

During each sampling period, a continuous sample of the RICE exhaust gas stream was extracted from the stack using a stainless steel probe connected to a Teflon® heated sample line. The sampled gas was conditioned by removing moisture prior to being introduced to the analyzers; therefore, measurement of O₂ and CO₂ concentrations correspond to standard dry gas conditions. Instrument response data were recorded using an ESC Model 8816 data acquisition system that monitored the analog output of the instrumental analyzers continuously and logged data as one-minute averages.

Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document). Sampling times were recorded on field data sheets.

Appendix 4 provides O₂ and CO₂ calculation sheets. Raw instrument response data are provided in Appendix 5.

4.4 Exhaust Gas Moisture Content (USEPA Method 4)

The moisture content of the RICE exhaust gas was determined in accordance with USEPA Method 4 using a chilled impinger sampling train. The moisture sampling was performed concurrently with the instrumental analyzer sampling. During each sampling period a gas sample was extracted at a constant rate from the source where moisture was removed from the sampled gas stream using impingers that were submersed in an ice bath. At the conclusion of each sampling period, the moisture gain in the impingers was determined.

RECEIVED
FEB 13 2023

gravimetrically by weighing each impinger to determine net weight gain. Moisture sampling was performed from a single centroid location.

4.5 NO_x and CO Concentration Measurements (USEPA Methods 7E and 10)

NO_x and CO pollutant concentrations in the RICE exhaust gas streams were determined using a Thermo Environmental Instruments, Inc. (TEI) Model 42i High Level chemiluminescence NO_x analyzer and a TEI Model 48i infrared CO analyzer.

Throughout each test period, a continuous sample of the engine exhaust gas was extracted from the stack using the Teflon® heated sample line and gas conditioning system and delivered to the instrumental analyzers. Instrument response for each analyzer was recorded on an ESC Model 8816 data acquisition system that logged data as one-minute averages. Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias.

Appendix 4 provides CO and NO_x calculation sheets. Raw instrument response data are provided in Appendix 5.

4.6 Measurement of Volatile Organic Compounds (USEPA Method 25A/ALT-096)

The VOC emission rate was determined by measuring the nonmethane hydrocarbon (NMHC) concentration in the engine exhaust gas. NMHC pollutant concentration was determined using a TEI Model 55i Methane / Nonmethane hydrocarbon analyzer. The TEI 55i analyzer contains an internal gas chromatograph column that separates methane from non-methane components. The concentration of NMHC in the sampled gas stream, after separation from methane, is determined relative to a propane standard using a flame ionization detector in accordance with USEPA Method 25A.

The USEPA Office of Air Quality Planning and Standards (OAQPS) has issued an alternate test method approving the use of the TEI 55i-series analyzer as an effective instrument for measuring NMOC from gas-fueled RICE (ALT-096).

Samples of the exhaust gas were delivered directly to the instrumental analyzer using the Teflon® heated sample line to prevent condensation. The sample to the NMHC analyzer was not conditioned to remove moisture. Therefore, VOC measurements correspond to standard conditions with no moisture correction (wet basis).

Prior to, and at the conclusion of each test, the instrument was calibrated using mid-range calibration (propane) and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document).

Appendix 4 provides VOC calculation sheets. Raw instrument response data for the NMHC analyzer is provided in Appendix 5.

5.0 QA/QC Activities

5.1 Flow Measurement Equipment

Prior to arriving onsite, the instruments used during the source test to measure exhaust gas properties and velocity (barometer and Pitot tube) were calibrated to specifications in the sampling methods.

The absence of cyclonic flow for each sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each of the velocity traverse points with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

5.2 NO_x Converter Efficiency Test

The NO₂ – NO conversion efficiency of the Model 42i analyzer was verified prior to the testing program. A USEPA Protocol 1 certified concentration of NO₂ was injected directly into the analyzer, following the initial three-point calibration, to verify the analyzer's conversion efficiency. The analyzer's NO₂ – NO converter uses a catalyst at high temperatures to convert the NO₂ to NO for measurement. The conversion efficiency of the analyzer is deemed acceptable if the measured NO_x concentration is within 90% of the expected value.

The NO₂ – NO conversion efficiency test satisfied the USEPA Method 7E criteria (measured NO_x concentration was 95.5% of the expected value).

5.3 Gas Divider Certification (USEPA Method 205)

A STEC Model SGD-710C 10-step gas divider was used to obtain appropriate calibration span gases. The ten-step STEC gas divider was NIST certified (within the last 12 months) with a primary flow standard in accordance with Method 205. When cut with an appropriate zero gas, the ten-step STEC gas divider delivered calibration gas values ranging from 0% to 100% (in 10% step increments) of the USEPA Protocol 1 calibration gas that was introduced into the system. The field evaluation procedures presented in Section 3.2 of Method 205 were followed prior to use of gas divider. The field evaluation yielded no errors greater than 2% of the triplicate measured average and no errors greater than 2% from the expected values.

5.4 Instrumental Analyzer Interference Check

The instrumental analyzers used to measure NO_x, CO, O₂ and CO₂ have had an interference response test performed prior to their use in the field, pursuant to the interference response test procedures specified in USEPA Method 7E. The appropriate interference test gases (i.e., gases that would be encountered in the exhaust gas stream) were introduced into each analyzer, separately and as a mixture with the analyte that each analyzer is designed to measure. All of analyzers exhibited a composite deviation of less than 2.5% of the span for all

measured interferent gases. No major analytical components of the analyzers have been replaced since performing the original interference tests.

5.5 Instrument Calibration and System Bias Checks

At the beginning of each day of the testing program, initial three-point instrument calibrations were performed for the NO_x, CO, CO₂ and O₂ analyzers by injecting calibration gas directly into the inlet sample port for each instrument. System bias checks were performed prior to and at the conclusion of each sampling period by introducing the upscale calibration gas and zero gas into the sampling system (at the base of the stainless steel sampling probe prior to the particulate filter and Teflon® heated sample line) and determining the instrument response against the initial instrument calibration readings.

At the beginning of each test day, appropriate high-range, mid-range, and low-range span gases followed by a zero gas were introduced to the NMHC analyzer, in series at a tee connection, which is installed between the sample probe and the particulate filter, through a poppet check valve. After each one hour test period, mid-range and zero gases were re-introduced in series at the tee connection in the sampling system to check against the method's performance specifications for calibration drift and zero drift error.

The instruments were calibrated with USEPA Protocol 1 certified concentrations of CO₂, O₂, NO_x, and CO in nitrogen and zeroed using hydrocarbon free nitrogen. The NMHC (VOC) instrument was calibrated with USEPA Protocol 1 certified concentrations of propane in air and zeroed using hydrocarbon-free air. A STEC Model SGD-710C ten-step gas divider was used to obtain intermediate calibration gas concentrations as needed.

5.6 Determination of Exhaust Gas Stratification

A stratification test was performed for each RICE exhaust stack. The stainless steel sample probe was positioned at sample points correlating to 16.7, 50.0 (centroid) and 83.3% of the stack diameter. Pollutant concentration data were recorded at each sample point for a minimum of twice the maximum system response time.

The recorded concentration data for the RICE exhaust stacks indicated that the measured CO, NO_x, O₂ and CO₂ concentrations did not vary by more than 5% of the mean across the stack diameter. Therefore, the RICE exhaust gas was considered to be unstratified and the compliance test sampling was performed at a single sampling location within each RICE exhaust stack.

5.7 Meter Box Calibrations

The dry gas metering console, which was used for exhaust gas moisture content sampling, was calibrated prior to and after the testing program. This calibration uses the critical orifice calibration technique presented in USEPA Method 5. The metering console calibration exhibited no data outside the acceptable ranges presented in USEPA Method 5.

The digital pyrometer in the Clean Air metering console was calibrated using a NIST traceable Omega® Model CL 23A temperature calibrator.

Appendix 6 presents test equipment quality assurance data (NO_2 – NO conversion efficiency test data, instrument calibration and system bias check records, calibration gas and gas divider certifications, interference test results, meter box calibration records, stratification checks).

6.0 Results

6.1 Test Results and Allowable Emission Limits

Engine operating data and air pollutant emission measurement results for each one-hour test period are presented in Tables 6.1 – 6.4.

FGENGINES-S2/FGRICENSPS-S2 has the following allowable emission limits specified for each engine in MI-ROP-N5432-2022:

- 16.3 lb/hr and 5.0 g/bhp-hr for CO;
- 3.0 lb/hr and 3.0 g/bhp-hr for NO_x; and
- 1.0 g/bhp-hr for VOC (does not include CHOH emissions).

In addition to the short term emission limits listed above, FGENGINES-S2 has the following annual emission limits:

- 212.0 TpY for CO (all engines combined); and
- 92.0 TpY for VOC (all engines combined, includes CHOH emissions).

The measured air pollutant concentrations and emission rates for EUENGINE1-S2 – EUENGINE3-S2 are less than the allowable limits specified in MI-ROP-N5432-2022.

6.2 Variations from Normal Sampling Procedures or Operating Conditions

The testing for all pollutants was performed in accordance with USEPA methods and the approved test protocol. The engine-generator sets were operated within 10% of maximum output (1,600 kW generator output for CAT® G3520 RICE) and no variations from normal operating conditions occurred during the engine test periods.

Table 6.1 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 1 (EUENGINE1-S2)

Test No.	1	2	3	
Test date	12/13/22	12/13/22	12/13/22	Three Test
Test period (24-hr clock)	822-922	958-1058	1130-1230	Average
Fuel flowrate (scfm)	596	597	594	596
Generator output (kW)	1,584	1,586	1,591	1,587
Engine output (bhp-hr)	2,220	2,222	2,229	2,224
LFG methane content (%)	51.1	51.0	51.1	51.0
<u>Exhaust Gas Composition</u>				
CO ₂ content (% vol)	11.4	11.3	11.6	11.5
O ₂ content (% vol)	8.59	8.61	8.61	8.60
Moisture (% vol)	14.6	12.1	11.8	12.8
Exhaust gas flowrate (dscfm)	4,175	4,201	4,218	4,198
Exhaust gas flowrate (scfm)	4,891	4,780	4,785	4,819
<u>Nitrogen Oxides</u>				
NO _x conc. (ppmvd)	43.6	42.8	42.7	43.05
NO _x emissions (lb/hr)	1.3	1.3	1.3	1.3
Permit Limit (lb/hr)	-	-	-	3.0
NO _x emissions (g/bhp-hr)	0.3	0.3	0.3	0.3
Permit Limit (g/bhp-hr)	-	-	-	3.0
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	681	682	682	682
CO emissions (lb/hr)	12.4	12.5	12.6	12.5
Permit Limit (lb/hr)	-	-	-	16.3
CO emissions (g/bhp-hr)	2.5	2.5	2.5	2.5
Permit Limit (g/bhp-hr)	-	-	-	5.0
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	22.8	22.7	22.5	22.6
VOC emissions (g/bhp-hr)	0.2	0.2	0.2	0.2
Permit Limit (g/bhp-hr)	-	-	-	1.0

Table 6.2 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 2 (EUENGINE2-S2)

Test No.	1	2	3	
Test date	12/13/22	12/13/22	12/13/22	Three Test
Test period (24-hr clock)	822-922	958-1058	1130-1230	Average
Fuel flowrate (scfm)	599	599	606	601
Generator output (kW)	1,586	1,591	1,586	1,588
Engine output (bhp-hr)	2,222	2,230	2,222	2,224
LFG methane content (%)	51.0	51.1	51.0	51.0
<u>Exhaust Gas Composition</u>				
CO ₂ content (% vol)	11.5	11.5	11.5	11.5
O ₂ content (% vol)	8.46	8.46	8.45	8.45
Moisture (% vol)	11.5	11.2	11.3	11.3
Exhaust gas flowrate (dscfm)	4,325	4,317	4,247	4,296
Exhaust gas flowrate (scfm)	4,886	4,862	4,786	4,845
<u>Nitrogen Oxides</u>				
NO _x conc. (ppmvd)	54.5	55.3	55.2	55.02
NO _x emissions (lb/hr)	1.7	1.7	1.7	1.7
Permit Limit (lb/hr)	-	-	-	3.0
NO _x emissions (g/bhp-hr)	0.3	0.4	0.3	0.3
Permit Limit (g/bhp-hr)	-	-	-	3.0
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	665	662	662	663
CO emissions (lb/hr)	12.6	12.5	12.3	12.4
Permit Limit (lb/hr)	-	-	-	16.3
CO emissions (g/bhp-hr)	2.6	2.5	2.5	2.5
Permit Limit (g/bhp-hr)	-	-	-	5.0
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	15.1	14.9	13.7	14.6
VOC emissions (g/bhp-hr)	0.1	0.1	0.1	0.1
Permit Limit (g/bhp-hr)	-	-	-	1.0

RECEIVED

FEB 13 2023

Table 6.3 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 3 (EUENGINE3-S2)

Test No.	1	2	3	
Test date	12/14/22	12/14/22	12/14/22	Three Test
Test period (24-hr clock)	750-850	921-1021	1048-1148	Average
Fuel flowrate (scfm)	561	569	565	565
Generator output (kW)	1,592	1,589	1,586	1,589
Engine output (bhp-hr)	2,229	2,232	2,231	2,231
LFG methane content (%)	51.0	50.9	50.9	51.0
<u>Exhaust Gas Composition</u>				
CO ₂ content (% vol)	11.5	11.5	11.5	11.5
O ₂ content (% vol)	8.46	8.47	8.47	8.47
Moisture (% vol)	11.1	11.1	11.4	11.2
Exhaust gas flowrate (dscfm)	4,313	4,364	4,280	4,319
Exhaust gas flowrate (scfm)	4,851	4,907	4,834	4,864
<u>Nitrogen Oxides</u>				
NO _x conc. (ppmvd)	60.7	57.5	57.3	58.5
NO _x emissions (lb/hr)	1.9	1.8	1.8	1.8
Permit Limit (lb/hr)	-	-	-	3.0
NO _x emissions (g/bhp-hr)	0.4	0.4	0.4	0.4
Permit Limit (g/bhp-hr)	-	-	-	3.0
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	656	655	660	657
CO emissions (lb/hr)	12.4	12.5	12.3	12.4
Permit Limit (lb/hr)	-	-	-	16.3
CO emissions (g/bhp-hr)	2.5	2.5	2.5	2.5
Permit Limit (g/bhp-hr)	-	-	-	5.0
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	16.4	16.9	16.9	16.7
VOC emissions (g/bhp-hr)	0.1	0.1	0.1	0.1
Permit Limit (g/bhp-hr)	-	-	-	1.0

Table 6.4 Maximum calculated annual emissions for FGENGINES-S2 based on measured hourly emission rates

Emission Group	CO	VOC
	(TpY)	(TpY)
FGENGINES-S2	163.4	7.9
Permit Limit	212.0	92.0


Notes for Table 6.4:

1. Annual emissions are based on 8,760 hours of operation for each engine at their measured emission rates.
2. VOC emissions do not include CHOH emissions. CHOH was not required to be measured during this test event.


APPENDIX 1

- RICE Engine Sample Port Diagram

EUENGINE1-S2,
EUENGINE2-S2, &
EUENGINE3-S2

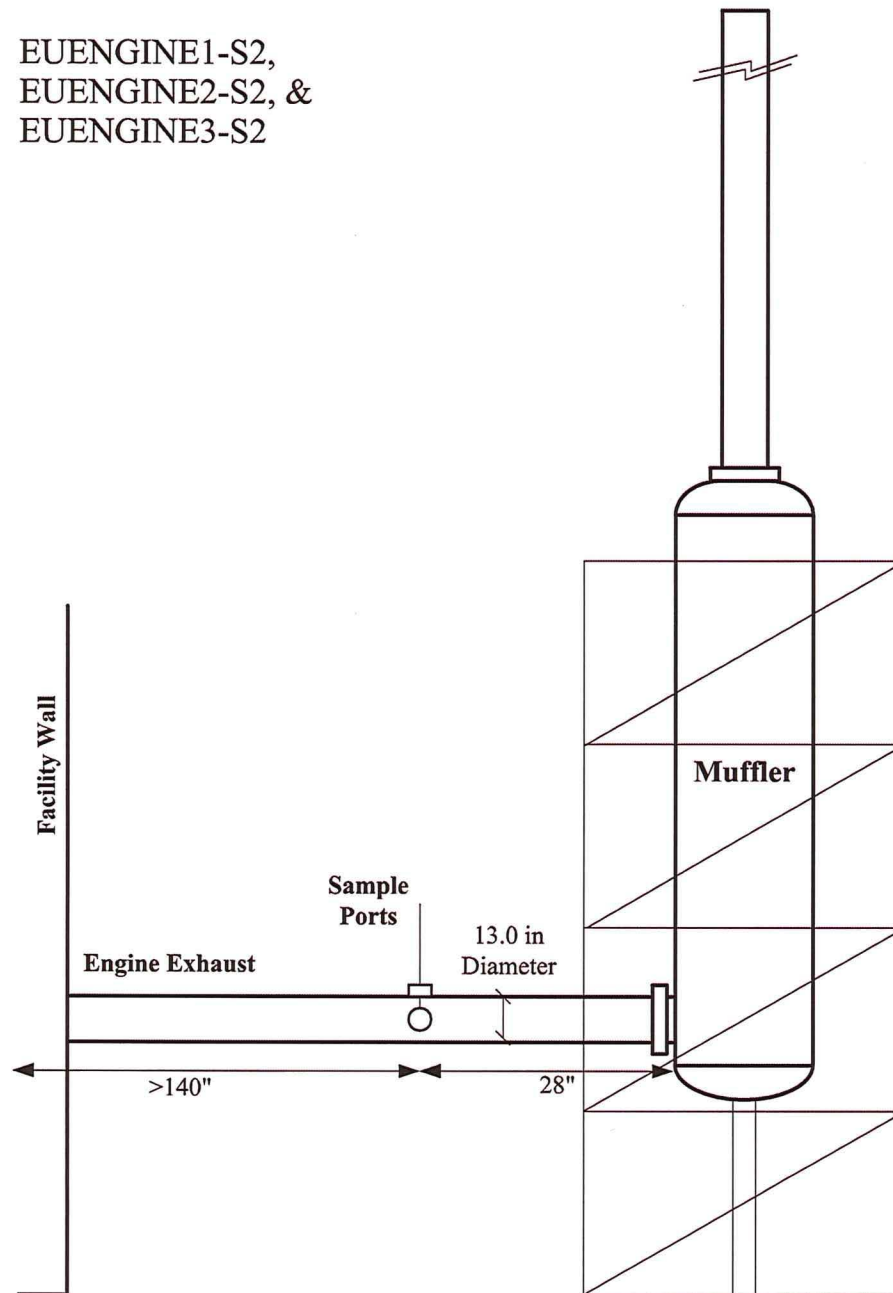

Exhaust Stack
Cross-Section

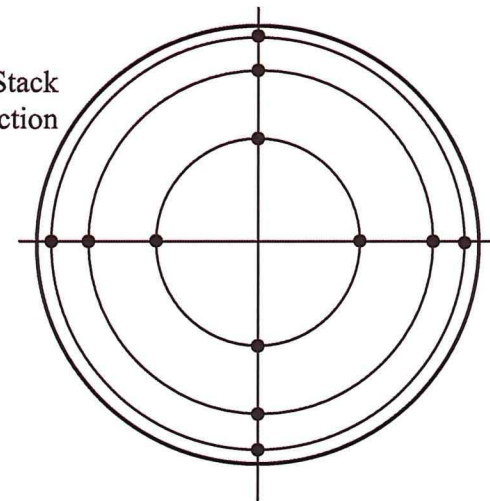

Velocity sample locations as
measured from stack wall

Pt. #	in.
1	0.57
2	1.90
3	3.85
4	9.15
5	11.10
6	12.43

8/10/2021

NANR SBL-LLC

Exhaust Sample Location, CAT®G3520C RICE

Scale
None

Sheet
1 of 1

