

RECEIVED

JUL 25 2023

AIR QUALITY DIVISION

**AIR EMISSION TEST REPORT
FOR THE
VERIFICATION OF AIR POLLUTANT EMISSIONS
FROM
LANDFILL GAS FIRED ENGINE – GENERATOR SETS**

**Prepared for:
North American Natural Resources
Venice Park Renewable Energy Facility
SRN N5910**

ICT Project No.: 2300095

July 6, 2023



Report Certification

**AIR EMISSION TEST REPORT
FOR THE
VERIFICATION OF AIR POLLUTANT EMISSIONS
FROM
LANDFILL GAS FIRED ENGINE – GENERATOR SETS**

**North American Natural Resources
Venice Park Renewable Energy Facility
Lennon, Michigan**

The material and data in this document were prepared under the supervision and direction of the undersigned.

Impact Compliance and Testing, Inc.



Andrew C. Eisenberg
Environmental Consultant

Table of Contents

1.0 INTRODUCTION.....	1
2.0 SUMMARY OF TEST RESULTS AND OPERATING CONDITIONS	2
2.1 Purpose and Objective of the Tests	2
2.2 Operating Conditions During the Compliance Tests.....	2
2.3 Summary of Air Pollutant Sampling Results	2
3.0 SOURCE AND SAMPLING LOCATION DESCRIPTION	4
3.1 General Process Description	4
3.2 Rated Capacities and Air Emission Controls	4
3.3 Sampling Locations.....	4
4.0 SAMPLING AND ANALYTICAL PROCEDURES.....	5
4.1 Summary of Sampling Methods	5
4.2 Exhaust Gas Velocity Determination (USEPA Method 2).....	6
4.3 Exhaust Gas Molecular Weight Determination (USEPA Methods 3A)	6
4.4 Exhaust Gas Moisture Content (USEPA Method 4)	6
4.5 NO _x and CO Concentration Measurements (USEPA Methods 7E and 10)	7
4.6 Measurement of VOC (USEPA Method 25A / ALT-096)	7
5.0 QA/QC ACTIVITIES.....	8
5.1 Flow Measurement Equipment	8
5.2 NO _x Converter Efficiency Test.....	8
5.3 Gas Divider Certification (USEPA Method 205).....	8
5.4 Instrumental Analyzer Interference Check.....	8
5.5 Instrument Calibration and System Bias Checks.....	9
5.6 Determination of Exhaust Gas Stratification	9
5.7 System Response Time	9
5.8 Meter Box Calibrations.....	9
5.9 Cyclonic Flow Check.....	10
6.0 RESULTS.....	11
6.1 Test Results and Allowable Emission Limits.....	11
6.2 Variations from Normal Sampling Procedures or Operating Conditions.....	11

List of Tables

2.1	Average operating conditions during the test periods.....	3
2.2	Average measured air pollutant concentrations for each engine (three-test average).....	3
6.1	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 8R (EUNANRENGINE8R).....	12
6.2	Measured exhaust gas conditions and air pollutant emission rates for Engine No. 9 (EUNANRENGINE9).....	13

List of Appendices

APPENDIX 1	SAMPLING DIAGRAMS
APPENDIX 2	OPERATING RECORDS
APPENDIX 3	FLOWRATE CALCULATIONS AND DATA SHEETS
APPENDIX 4	CO ₂ , O ₂ , CO, NO _X , AND VOC CALCULATIONS
APPENDIX 5	INSTRUMENTAL ANALYZER RAW DATA
APPENDIX 6	QA/QC RECORDS

1.0 Introduction

North American Natural Resources (NANR) operates landfill gas (LFG) fueled reciprocating internal combustion engine and electricity generator sets (RICE gensets) at the Venice Park Renewable Energy Facility (Venice Park) in Lennon, Shiawassee County, Michigan. The RICE gensets are fueled by LFG that is recovered from the Venice Park Recycling & Disposal facility (RDF) and treated prior to use.

The State of Michigan Department of Environment, Great Lakes, and Energy – Air Quality Division (EGLE-AQD) has issued to NANR a Renewable Operating Permit (MI-ROP-N5910-2022) for operation of the renewable electricity generation facility, which consists of:

- Four (4) Caterpillar (CAT®) Model No. G3520C RICE gensets identified as emission units EUNANRENGINE7R, EUNANRENGINE8R, EUNANRENGINE9, and EUNANRENGINE10 (Flexible Group ID: FGENGINES7R-10)

Air emission compliance testing was performed pursuant to MI-ROP-N5910-2022. Conditions of MI-ROP-N5910-2022 for FGENGINES7R-10 state:

1. *...the permittee shall conduct an initial performance test for each engine in FGENGINES7R-10 within one year after startup of the engine and every 8760 hours of operation (as determined through the use of a non-resettable hour meter) or three years, whichever occurs first, to demonstrate compliance with the emission limits in 40 CFR 60.4233(e)...*
2. *The permittee shall verify formaldehyde emissions rates from one or more engines in FGENGINES7R-10 once every 5 years...*

The compliance testing presented in this report was performed by Impact Compliance & Testing, Inc. (ICT), a Michigan-based environmental consulting and testing company. ICT representatives Andrew Eisenberg and Blake Beddow performed the field sampling and measurements May 31, 2023.

The engine emission performance tests consisted of triplicate, one-hour sampling periods for nitrogen oxides (NO_x), carbon monoxide (CO), and volatile organic compounds (VOC, as non-methane hydrocarbons (NMHC or NMOC)). Exhaust gas velocity, moisture, oxygen (O₂) content, and carbon dioxide (CO₂) content were determined for each test period to calculate volumetric exhaust gas flowrate and pollutant mass emission rates.

The exhaust gas sampling and analysis was performed using procedures specified in the Stack Test Protocol dated February 09, 2023, that was reviewed and approved by EGLE-AQD. Questions regarding this air emission test report should be directed to:

Andrew Eisenberg
Environmental Consultant
Impact Compliance & Testing, Inc.
37660 Hills Tech Drive
Farmington Hills, MI 48331
(734) 357-8406
Andrew.Eisenberg@ImpactCandT.com

Mr. Eric Parker
Environmental Manager
Kinder Morgan
6 Desta Dr., Ste. 6000
Midland, TX 79705
(432) 230-0956
Eric_Parker@kindermorgan.com

2.0 Summary of Test Results and Operating Conditions

2.1 Purpose and Objective of the Tests

Conditions of MI-ROP-N5910-2022 require NANR to test each engine in FGENGINES7R-10 for CO, NO_x, and VOC emissions. EUNANREENGINE8R, and EUNANREENGINE9 were tested during this compliance test event. EUNANREENGINE7R and EUNANREENGINE10 have hours remaining (have not reached 8,760 hours since the last test event). These two engines will be tested at a later date.

2.2 Operating Conditions During the Compliance Tests

The testing was performed while the NANR engine/generator sets were operated at maximum operating conditions (within 10% of 1,600-kilowatt (kW) electricity output). NANR representatives monitored and recorded generated power output (kW), fuel use (pounds per hour, lb/hr and standard cubic feet per minute, scfm), fuel methane content (%), inlet pressure (psi), and air-to-fuel ratio at 15-minute increments for each test period.

Appendix 2 provides operating records provided by NANR representatives for the test periods.

Table 2.1 presents a summary of the average engine operating conditions during the test periods.

Average output, fuel consumption, fuel methane content, inlet pressure, and air-to-fuel ratio for each RICE are presented in Table 2.1 and Tables 6.1-6.2.

2.3 Summary of Air Pollutant Sampling Results

The gases exhausted from the sampled LFG fueled RICE (Engine Nos. 8R & 9 / EUNANREENGINE8R & EUNANREENGINE9) were each sampled for three (3) one-hour test periods during the compliance testing performed May 31, 2023.

Table 2.2 presents the average measured CO, NO_x, and VOC emission rates for each engine (average of the three test periods).

Test results for each one-hour sampling period and comparison to the permitted emission rates are presented in Section 6.0 of this report.

Table 2.1 Average engine operating conditions during the test periods

Engine Parameter	EUNANENGINE8R CAT® G3520C	EUNANENGINE9 CAT® G3520C
Generator output (kW)	1,611	1,624
Engine output (bhp)	2,248	2,267
Engine LFG fuel use (scfm or lb/hr)	597 scfm	2,615 lb/hr
LFG methane content (%)	50.2	50.2
Air to Fuel Ratio	7.8	7.7

Table 2.2 Average measured emission rates for each engine (three-test average)

Emission Unit	CO		NOx		VOC
	(lb/hr)	(g/bhp-hr)	(lb/hr)	(g/bhp-hr)	(g/bhp-hr)
EUNANENGINE8R	12.86	2.59	2.14	0.43	0.14
EUNANENGINE9	11.31	2.26	1.15	0.23	0.13
Permit Limit	16.30	3.30	2.97	2.0	0.63

3.0 Source and Sampling Location Description

3.1 General Process Description

NANR is permitted to operate four (4) RICE-generator sets (CAT® Model No. G3520C) at its facility. The units are fired exclusively with LFG that is recovered from the Venice Park RDF facility and treated prior to use.

3.2 Rated Capacities and Air Emission Controls

The CAT® G3520C engine generator sets each have a rated design capacity of:

- Engine Power: 2,233 brake horsepower (bhp)
- Electricity Generation: 1,600 kW

Each engine is equipped with an electronic air-to-fuel ratio (AFR) controller that blends the appropriate ratio of combustion air and treated LFG fuel.

The RICE are not equipped with add-on emission control devices. The AFR controller maintains efficient fuel combustion, which minimizes air pollutant emissions. Exhaust gas is exhausted directly to atmosphere through noise mufflers and vertical exhaust stacks.

3.3 Sampling Locations

Each RICE exhaust gas is directed through a muffler and is released to the atmosphere through a dedicated vertical exhaust stack with a vertical release point.

The exhaust stacks for Engine Nos. 8R & 9 / EUNANRENGINE8R & EUNANRENGINE9 are identical. The exhaust stack sampling ports are located after the muffler in the vertical exhaust stacks, each with an inner diameter of 13.5 inches. Each stack is equipped with two (2) sample ports, opposed 90°, that provide a sampling location at least 0.5 duct diameters upstream and at least 2.0 duct diameters downstream from any flow disturbance.

All sample port locations satisfy the USEPA Method 1 criteria for a representative sample location. Individual traverse points were determined in accordance with USEPA Method 1.

Appendix 1 provides a diagram of the emission test sampling locations with actual stack dimension measurements.

RECEIVED

JUL 25 2023

AIR QUALITY DIVISION

4.0 Sampling and Analytical Procedures

A Stack Test Protocol for the air emission testing was reviewed and approved by the EGLE-AQD. This section provides a summary of the sampling and analytical procedures that were used during the testing periods.

4.1 Summary of Sampling Methods

USEPA Method 1	Exhaust gas velocity measurement locations were determined based on the physical stack arrangement and requirements in USEPA Method 1.
USEPA Method 2	Exhaust gas velocity pressure was determined using a Type-S Pitot tube connected to a red oil incline manometer; temperature was measured using a K-type thermocouple connected to the Pitot tube.
USEPA Method 3A	Exhaust gas O ₂ and CO ₂ content was determined using paramagnetic and infrared instrumental analyzers, respectively.
USEPA Method 4	Exhaust gas moisture was determined based on the water weight gain in chilled impingers.
USEPA Method 7E	Exhaust gas NO _x concentration was determined using chemiluminescence instrumental analyzers.
USEPA Method 10	Exhaust gas CO concentration was measured using an infrared instrumental analyzer.
USEPA Method 25A / ALT-096	Exhaust gas VOC (as NMHC) concentration was determined using a flame ionization analyzer equipped with methane separation column.

4.2 Exhaust Gas Velocity Determination (USEPA Method 2)

The RICE exhaust stack gas velocities and volumetric flow rates were determined using USEPA Method 2 once during each test period. An S-type Pitot tube connected to a red-oil manometer was used to determine velocity pressure at each traverse point across the stack cross section. Gas temperature was measured using a K-type thermocouple mounted to the Pitot tube. The Pitot tube and connective tubing were leak-checked periodically throughout the test periods to verify the integrity of the measurement system.

The absence of significant cyclonic flow at the sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each velocity traverse point with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

Appendix 3 provides exhaust gas flowrate calculations and field data sheets.

4.3 Exhaust Gas Molecular Weight Determination (USEPA Method 3A)

CO₂ and O₂ content in the RICE exhaust gas stream were measured continuously throughout each test period in accordance with USEPA Method 3A. The CO₂ content of the exhaust was monitored using a M&C GenTwo infrared gas analyzer. The O₂ content of the exhaust was monitored using a M&C GenTwo gas analyzer that uses a paramagnetic sensor.

During each sampling period, a continuous sample of the RICE exhaust gas stream was extracted from the stack using a stainless-steel probe connected to a Teflon® heated sample line. The sampled gas was conditioned by removing moisture prior to being introduced to the analyzers; therefore, measurement of O₂ and CO₂ concentrations correspond to standard dry gas conditions. Instrument response data were recorded using an ESC Model 8816 data acquisition system that monitored the analog output of the instrumental analyzers continuously and logged data as one-minute averages.

Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document). Sampling times were recorded on field data sheets.

Appendix 4 provides O₂ and CO₂ calculation sheets. Raw instrument response data are provided in Appendix 5.

4.4 Exhaust Gas Moisture Determination (USEPA Method 4)

Moisture content of each RICE exhaust gas was determined in accordance with USEPA Method 4 using a chilled impinger sampling train. Exhaust gas moisture content measurements were performed concurrently with the instrumental analyzer sampling periods. At the conclusion of each sampling period the moisture gain in the impingers was determined gravimetrically by weighing each impinger to determine net weight gain.

Appendix 3 provides moisture calculations and data sheets.

4.5 NO_x and CO Concentration Measurements (USEPA Methods 7E and 10)

NO_x and CO pollutant concentrations in the RICE exhaust gas streams were determined using a Thermo Environmental Instruments, Inc. (TEI) Model 42i High Level chemiluminescence NO_x analyzer and a M&C GenTwo infrared CO analyzer.

Throughout each test period, a continuous sample of the engine exhaust gas was extracted from the stack using the Teflon® heated sample line and gas conditioning system and delivered to the instrumental analyzers. Instrument response for each analyzer was recorded on an ESC Model 8816 data acquisition system that logged data as one-minute averages. Prior to, and at the conclusion of each test, the instruments were calibrated using upscale calibration and zero gas to determine analyzer calibration error and system bias.

Appendix 4 provides CO and NO_x calculation sheets. Raw instrument response data are provided in Appendix 5.

4.6 Measurement of Volatile Organic Compounds (USEPA Method 25A/ALT-096)

The VOC emission rate was determined by measuring the nonmethane hydrocarbon (NMHC or NMOC) concentration in the engine exhaust gas. NMHC pollutant concentration was determined using a TEI Model 55i Methane / Nonmethane hydrocarbon analyzer. The TEI 55i analyzer contains an internal gas chromatograph column that separates methane from non-methane components. The concentration of NMHC in the sampled gas stream, after separation from methane, is determined relative to a propane standard using a flame ionization detector in accordance with USEPA Method 25A.

The USEPA Office of Air Quality Planning and Standards (OAQPS) has issued an alternate test method approving the use of the TEI 55i-series analyzer as an effective instrument for measuring NMOC from gas-fueled RICE (ALT-096).

Samples of the exhaust gas were delivered directly to the instrumental analyzer using the Teflon® heated sample line to prevent condensation. The sample to the NHMC analyzer was not conditioned to remove moisture. Therefore, VOC measurements correspond to standard conditions with no moisture correction (wet basis).

Prior to, and at the conclusion of each test, the instrument was calibrated using mid-range calibration (propane) and zero gas to determine analyzer calibration error and system bias (described in Section 5.0 of this document).

Appendix 4 provides VOC calculation sheets. Raw instrument response data for the NMHC analyzer is provided in Appendix 5.

5.0 QA/QC Activities

5.1 Flow Measurement Equipment

Prior to arriving onsite, the instruments used during the source test to measure exhaust gas properties and velocity (Pitot tube and scale) were calibrated to specifications in the sampling methods.

The absence of cyclonic flow for each sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at each of the velocity traverse points with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

5.2 NO_x Converter Efficiency Test

The NO₂ – NO conversion efficiency of the Model 42c analyzer was verified prior to the testing program. A USEPA Protocol 1 certified concentration of NO₂ was injected directly into the analyzer, following the initial three-point calibration, to verify the analyzer's conversion efficiency. The analyzer's NO₂ – NO converter uses a catalyst at high temperatures to convert the NO₂ to NO for measurement. The conversion efficiency of the analyzer is deemed acceptable if the measured NO_x concentration is within 10% of the expected value.

The NO₂ – NO conversion efficiency test satisfied the USEPA Method 7E criteria (measured NO_x concentration was 96.2% of the expected value).

5.3 Gas Divider Certification (USEPA Method 205)

A STEC Model SGD-710C 10-step gas divider was used to obtain appropriate calibration span gases. The ten-step STEC gas divider was NIST certified (within the last 12 months) with a primary flow standard in accordance with Method 205. When cut with an appropriate zero gas, the ten-step STEC gas divider delivered calibration gas values ranging from 0% to 100% (in 10% step increments) of the USEPA Protocol 1 calibration gas that was introduced into the system. The field evaluation procedures presented in Section 3.2 of Method 205 were followed prior to use of gas divider. The field evaluation yielded no errors greater than 2% of the triplicate measured average and no errors greater than 2% from the expected values.

5.4 Instrumental Analyzer Interference Check

The instrumental analyzers used to measure NO_x, CO, O₂, and CO₂ have had an interference response test performed prior to their use in the field, pursuant to the interference response test procedures specified in USEPA Method 7E. The appropriate interference test gases (i.e., gases that would be encountered in the exhaust gas stream) were introduced into each analyzer, separately and as a mixture with the analyte that each analyzer is designed to measure. All the analyzers exhibited a composite deviation of less than 2.5% of the span for all measured interferent gases. No major analytical components of the analyzers have been replaced since performing the original interference tests.

5.5 Instrument Calibration and System Bias Checks

At the beginning of each day of the testing program, initial three-point instrument calibrations were performed for the NO_x, CO, CO₂, and O₂ analyzers by injecting calibration gas directly into the inlet sample port for each instrument. System bias checks were performed prior to and at the conclusion of each sampling period by introducing the upscale calibration gas and zero gas into the sampling system (at the base of the stainless-steel sampling probe prior to the particulate filter and Teflon® heated sample line) and determining the instrument response against the initial instrument calibration readings.

At the beginning of each test day, appropriate high-range, mid-range, and low-range span gases followed by a zero gas were introduced to the NMHC analyzer, in series at a tee connection, which is installed between the sample probe and the particulate filter, through a poppet check valve. After each one-hour test period, mid-range and zero gases were re-introduced in series at the tee connection in the sampling system to check against the method's performance specifications for calibration drift and zero drift error.

The instruments were calibrated with USEPA Protocol 1 certified concentrations of CO₂, O₂, NO_x, and CO in nitrogen and zeroed using hydrocarbon free nitrogen. The NMHC (VOC) instrument was calibrated with USEPA Protocol 1 certified concentrations of propane in air and zeroed using hydrocarbon-free air. A STEC Model SGD-710C ten-step gas divider was used to obtain intermediate calibration gas concentrations as needed.

5.6 Determination of Exhaust Gas Stratification

A stratification test was performed for each RICE exhaust stack. The stainless-steel sample probe was positioned at sample points correlating to 16.7, 50.0 (centroid), and 83.3% of the stack diameter. Pollutant concentration data were recorded at each sample point for a minimum of twice the maximum system response time.

The recorded concentration data for the RICE exhaust stacks indicated that the measured O₂, CO₂, CO, and NO_x concentrations did not vary by more than 5% of the mean across the stack diameter. Therefore, the RICE exhaust gas was considered to be unstratified and the compliance test sampling was performed at a single sampling location within each RICE exhaust stack.

5.7 System Response Time

The response time of the sampling system was determined prior to the compliance test program by introducing upscale gas and zero gas, in series, into the sampling system using a tee connection at the base of the sample probe. The elapsed time for the analyzer to display a reading of 95% of the expected concentration was determined using a stopwatch.

Sampling periods did not commence until the sampling probe had been in place for at least twice the greatest system response time.

5.8 Meter Box Calibrations

The dry gas meter sampling console used for moisture testing was calibrated prior to and after the testing program. This calibration uses the critical orifice calibration technique presented in USEPA Method 5. The metering console calibration exhibited no data outside the acceptable ranges presented in USEPA Method 5.

The digital pyrometer in the metering console was calibrated using a NIST traceable Omega® Model CL 23A temperature calibrator.

5.9 Cyclonic Flow Check

The absence of cyclonic flow for each sampling location was verified using an S-type Pitot tube and oil manometer. The Pitot tube was positioned at multiple velocity traverse points with the planes of the face openings of the Pitot tube perpendicular to the stack cross-sectional plane. The Pitot tube was then rotated to determine the null angle (rotational angle as measured from the perpendicular, or reference, position at which the differential pressure is equal to zero).

Appendix 6 presents test equipment quality assurance data (NO₂ – NO conversion efficiency test data, instrument calibration and system bias check records, calibration gas certifications, interference test results, meter box calibration records, and field equipment calibration records).

6.0 Results

6.1 Test Results and Allowable Emission Limits

Engine operating data and air pollutant emission measurement results for each one-hour test period are presented in Tables 6.1 and 6.2.

EUNANRENGINE8R and EUNANRENGINE9 each have the following allowable emission limits specified in MI-ROP-N5910-2022:

- 16.30 pounds per hour (lb/hr) and 3.30 grams per brake horsepower hour (g/bhp-hr) for CO;
- 2.97 lb/hr and 2.0 g/bhp-hr for NO_x; and
- 0.63 g/bhp-hr for VOC.

The measured air pollutant concentrations and emission rates for each EUNANRENGINE8R and EUNANRENGINE9 are less than the allowable limits specified in MI-ROP-N5910-2022.

6.2 Variations from Normal Sampling Procedures or Operating Conditions

The testing for all pollutants was performed in accordance with USEPA methods and the approved Stack Test Protocol. The RICE gensets were operated within 10% of maximum output (1,600 kW generator output for CAT® G3520C RICE) and no variations from normal operating conditions occurred during the engine test periods.

Table 6.1 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 8R (EUNANRENGINE8R)


Test No.	1	2	3	Three Test
Test date	5/31/2023	5/31/2023	5/31/2023	Average
Test period (24-hr clock)	0730-0830	0850-0950	1011-1111	
Fuel flowrate (scfm)	597	598	597	597
Generator output (kW)	1,604	1,617	1,612	1,611
Engine output (bhp)	2,239	2,256	2,250	2,248
LFG methane content (%)	50.2	50.2	50.2	50.2
<u>Exhaust Gas Composition</u>				
CO ₂ content (% vol)	11.37	11.37	11.32	11.35
O ₂ content (% vol)	8.67	8.72	8.76	8.72
Moisture (% vol)	10.0	11.4	11.3	10.9
Exhaust gas temperature (°F)	920.0	927.5	930.0	925.8
Exhaust gas flowrate (dscfm)	4,932	4,809	4,819	4,854
Exhaust gas flowrate (scfm)	5,482	5,429	5,436	5,449
<u>Nitrogen Oxides</u>				
NO _x conc. (ppmvd)	61.16	61.24	62.46	61.63
NO _x emissions (lb/hr)	2.16	2.11	2.16	2.14
<i>Permit Limit (lb/hr)</i>	-	-	-	2.97
NO _x emissions (g/bhp-hr)	0.44	0.42	0.44	0.43
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	2.0
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	608.21	604.78	607.73	606.90
CO emissions (lb/hr)	13.09	12.70	12.79	12.86
<i>Permit Limit (lb/hr)</i>	-	-	-	16.30
CO emissions (g/bhp-hr)	2.65	2.55	2.58	2.59
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	3.30
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	18.66	19.43	19.38	19.16
VOC emissions (g/bhp-hr)	0.14	0.15	0.15	0.14
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	0.63

Table 6.2 Measured exhaust gas conditions and air pollutant emission rates for Engine No. 9 (EUNANRENGINE9)

Test No.	1	2	3	Three Test
Test date	5/31/2023	5/31/2023	5/31/2023	Average
Test period (24-hr clock)	1128-1228	1245-1345	1358-1458	
Fuel flowrate (lb/hr)	2,628	2,609	2,610	2,615
Generator output (kW)	1,624	1,622	1,627	1,624
Engine output (bhp)	2,266	2,264	2,270	2,267
LFG methane content (%)	50.2	50.2	50.2	50.2
<u>Exhaust Gas Composition</u>				
CO ₂ content (% vol)	11.29	11.24	11.17	11.23
O ₂ content (% vol)	8.81	8.86	8.95	8.88
Moisture (% vol)	11.5	11.6	11.5	11.5
Exhaust gas temperature (°F)	930.0	925.0	929.0	928.0
Exhaust gas flowrate (dscfm)	4,758	4,788	4,785	4,777
Exhaust gas flowrate (scfm)	5,379	5,418	5,405	5,400
<u>Nitrogen Oxides</u>				
NO _x conc. (ppmvd)	33.35	33.60	33.75	33.57
NO _x emissions (lb/hr)	1.14	1.15	1.16	1.15
<i>Permit Limit (lb/hr)</i>	-	-	-	2.97
NO _x emissions (g/bhp-hr)	0.23	0.23	0.23	0.23
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	2.0
<u>Carbon Monoxide</u>				
CO conc. (ppmvd)	547.24	542.04	537.36	542.21
CO emissions (lb/hr)	11.37	11.33	11.22	11.31
<i>Permit Limit (lb/hr)</i>	-	-	-	16.30
CO emissions (g/bhp-hr)	2.28	2.27	2.24	2.26
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	3.30
<u>Volatile Organic Compounds</u>				
NMHC conc. (ppmv)	17.95	17.55	18.43	17.98
VOC emissions (g/bhp-hr)	0.13	0.13	0.14	0.13
<i>Permit Limit (g/bhp-hr)</i>	-	-	-	0.63

APPENDIX 1

- RICE Engine Sample Port Diagram

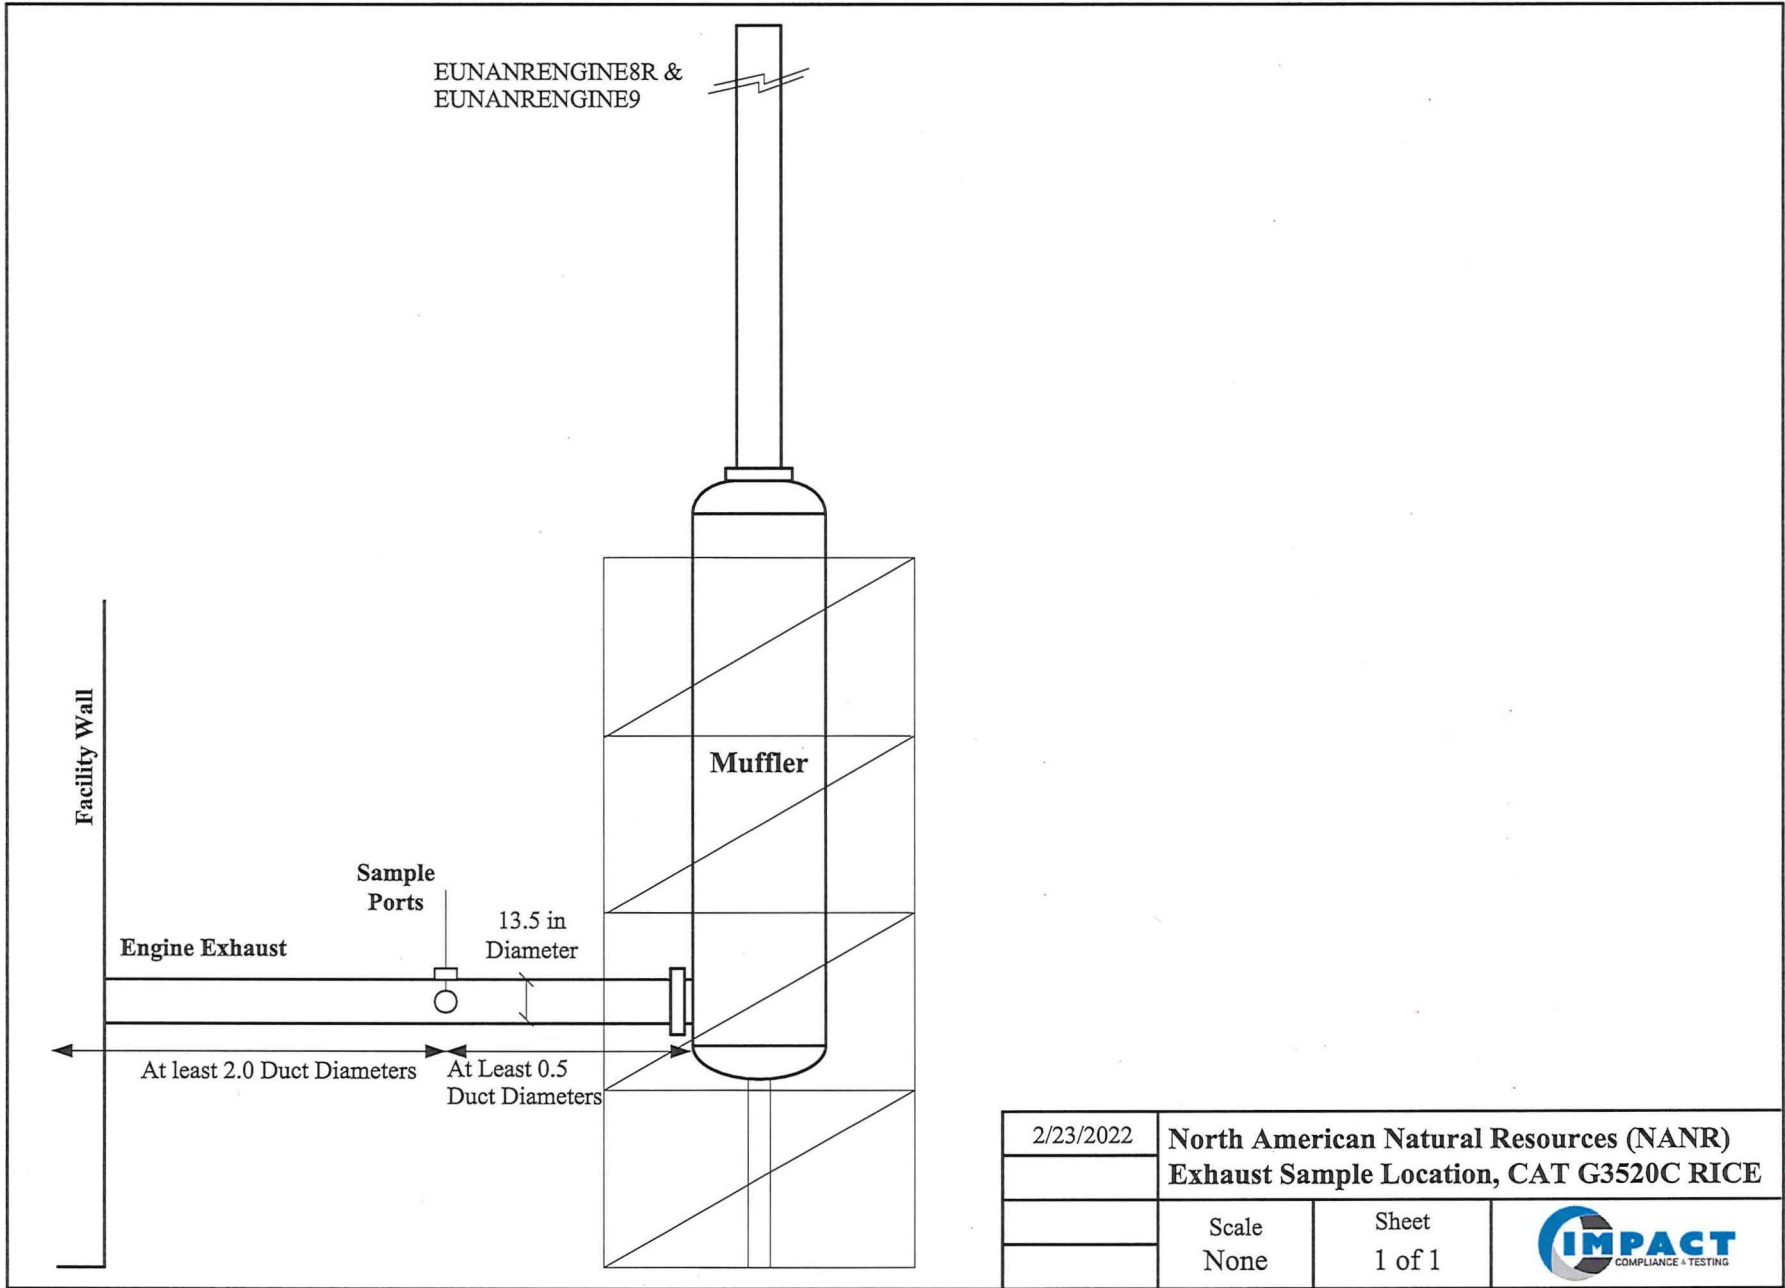

2/23/2022	North American Natural Resources (NANR)		
	Exhaust Sample Location, CAT G3520C RICE		
	Scale	Sheet	
	None	1 of 1	